


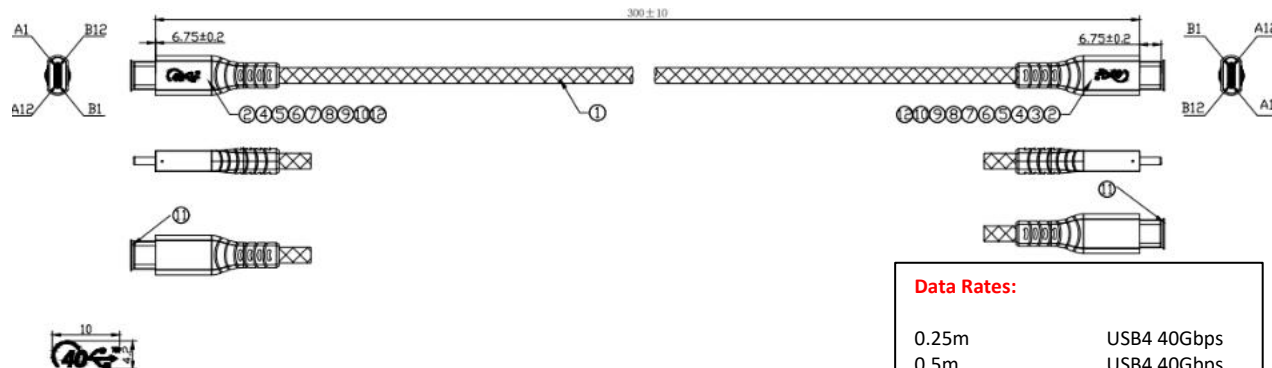

Data Rates:

0.25m	USB4 40Gbps
0.5m	USB4 40Gbps
1.0m	USB4 40Gbps
1.5m	USB4 20Gbps
2.0m	USB4 20Gbps

The USB ProSeries clearly stands out from the standard accessories. Robust and tight metal covers as well as the anti-pilling PET cable sheath are ideal properties for highest quality demands. The USB4 cable transfer all important transmission protocols for computing and multimedia area.

It supports i.a.:

- PCI Express
- USB4™ 40Gbps
- Thunderbolt™ 3 (partial)
- Displayport 2.0 up to 8K 0.25 - 1.0m, 4K 1.5 - 2.0m (uncompressed)
- SuperSpeed USB up to 40 Gbps
- PowerDelivery

Connect your notebook to your docking station with just one cable and you get access to all important interfaces, devices with high energy requirements can also be charged simultaneously with up to 100 watts (depending on the hardware used)

Info: not all devices with USB Type-C® interface support the 100 watts fast charging capability (PD 3.0), the transmission of video signals (DP-Alternate Mode) or data transfer of 40 Gbps (USB4™ 40Gbps 0.25 - 1.0m / 20 Gbps 1.5 - 2.0m / Thunderbolt™ 3), please contact your device manufacturer for more informations.

REVISED

DR

APP



- Connections: USB-C® plug to USB-C® plug
- Supports: DP-Alternate Mode Displayport 2.0 (up to 8K|6K|5K/60Hz, 4K/120Hz, 2x 4K/60Hz), PD bis zu 100W (20V/5A), SuperSpeed USB 5|10|20Gbps, PCI Express 3.0, Bidirectional data transfer
- Bandwidth up to: 40Gbps 0.25 - 1.0m / 20 Gbps 1.5 - 2.0m
- USB Version: USB 4.0 Gen 3x2 (USB4™ 40Gbps 0.25 - 1.0m / 20 Gbps 1.5 - 2.0m)
- Compatible to all USB-C® interfaces (i.a.): Hi-speed USB, SuperSpeed USB, Thunderbolt™ 3

- Number of shields: 3
- Shielding 1: ALU braid (100% density)
- Shielding 2: ALU foil laminated (100% density)
- Shielding 3: ALU braid (100% density)
- Wire material: tinned + silver-clad copper
- Wire structure: coaxial
- Plug: moulded with metal shielding
- Contact surface: pins gold plated 15µ
- Plug cover: metal (high quality aluminum alloy casing) integrated molding process, will not fall off
- Cable type: round cable
- Material cable sheath: PVC
- Outer sheath material: durable and antipilling PET braiding
- Cable sheath diameter (ca.): 5.6mm
- Color: grey (space grey)


1	CONNECTORS	USB-C® PLUG (MALE) - USB-C® PLUG (MALE)
2	MOLDING	INTEGRATED MOULDING PROCESS
3	CABLE	USB4 8 coaxial cable OD:4.8mm(7/0.1S*1C+SP50/0.05T+C U+HM)*8COAX+(7/0.08T*1P+HMAM)*1C+(7/0.08T*1 C+CU+HM)*4C+43/0.1T*1C+F+PAPER+B16/12/0.06T PVC (high elasticity) black + double gray zebra pattern (PET + twisted yarn) OD:5.6mm
NO	PART NAME	PICTURES AND COLORS CAN DIFFER FROM THE PRODU

DESCRIPTION

USB-C CONNECTING CABLE, 4.0 GEN 3x2, PRO

SIZE	A4	DATE	03.07.2025	CHECKED		TOL	13-67000
UNIT	MM	DRAWN	R.Hüller	APPROVED			
CUSTOM TARIF NO.: 854442909000							



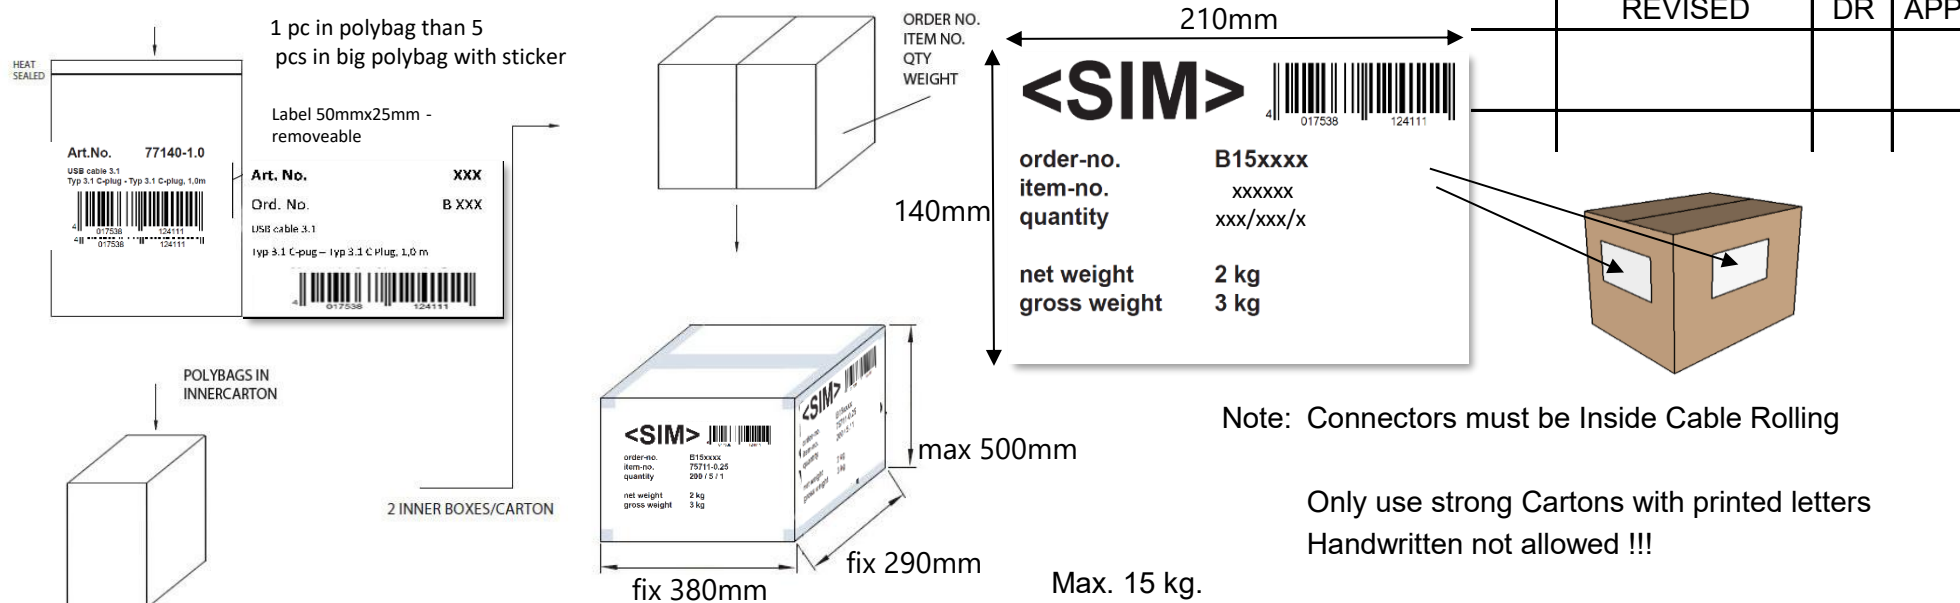

ART.NO.	LENGTH	ROLLING SIZE	NET.WEIGHT (g)	PACKING	EAN CODE
13-67000	0.25m	140x140x10mm	24g	250 EXP - 5/1 in polybag with sticker	4017538135162
13-67010	0.5m	140x140x12mm	36g	250 EXP - 5/1 in polybag with sticker	4017538135179
13-67020	1.0m	140x140x14mm	62g	200 EXP - 5/1 in polybag with sticker	4017538135186
13-67150	1.5m	140x140x15mm	90g	100 EXP - 5/1 in polybag with sticker	4017538135193
13-67030	2.0m	140x140x20mm	115g	80 EXP - 5/1 in polybag with sticker	4017538135209

DESCRIPTION		USB-C CONNECTING CABLE, 4.0 GEN 3x2, PRO					
SIZE	A4	DATE	03.07.2025	CHECKED		TOL	13-67000
UNIT	MM	DRAWN	R.Hüller	APPROVED			
CUSTOM TARIF NO.: 854442909000							