



	REVISED	DR	APP

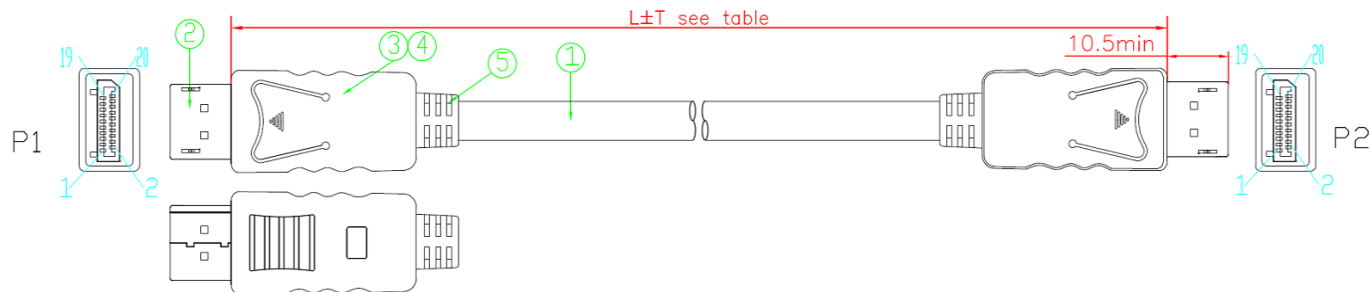

P/N	L/(M)	T/(MM)
10-50025	1	20
10-50035	2	30
10-50045	3	45

PIN OUT

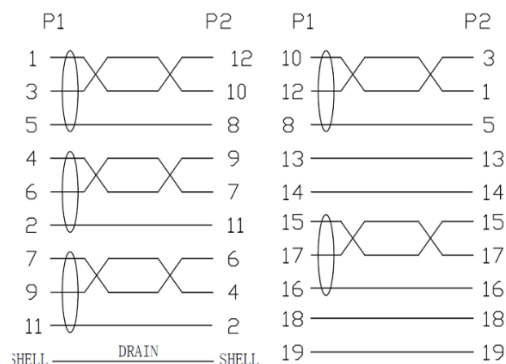

With the DisplayPort 1.2 cable you connect e.g. your graphic card with a monitor, TV or video projector.

A DisplayPort cable transmits digital video and audio signals. This cable supports a maximum bandwidth of 21.6 Gbps and a maximum resolution of 3840 x 2160 with 60Hz.

- Connections: DisplayPort plug to DisplayPort plug
- Wiring: 19-pins, no power supply, suitable for the direct connection of source/sink
- Resolution up to: 4K2K (60Hz), 2560 x 1440 (165Hz)
- Supports color sampling in 4:4:4, 4:2:2 and 4:2:0 format
- Supports: HDCP 1.3, 3D, Adaptive Sync, MST, HBR2
- max. Bandwidth: 21.6 Gbps
- DisplayPort Version: 1.2
- Backwards compatible: yes

NOTES:

1:100% short,open and miss wire test.

2:Resolution:4K*2K,60HZ.

2:CABLE MARKING:DisplayPort Cable E***** AWM
STYLE 20276 80°C 30V VW-1 V1.2

⑤	OUTER MOULDED	BLACK 45P PVC	0.048	KG
④	INNER MOULDED	LDPE	0.024	KG
③	HOUSING	ABS HOUSING FOR DP LATCHING TYPE,BLACK.	2	PCS
②	CONNECTOR	DISPLAYPORT LATCHING MALE,BLACK INSULATOR,GOLD PLATED PIN AND SHELL	2	PCS
①	CABLE	(1P*30AWG+D+FAM)*5C+4C*30AWG+AL+D+B,JACKET:BLACK PVC,OD:6.0±0.2MM.	L	M
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT




DESCRIPTION

DISPLAYPORT 1.2 CONNECTING CABLE, 19PIN

SIZE	A4	DATE	15.07.2025	CHECKED		TOL	
UNIT	MM	DRAWN	R.Hüller	APPROVED			
CUSTOM TARIF NO.: 85444290900							

10-50025

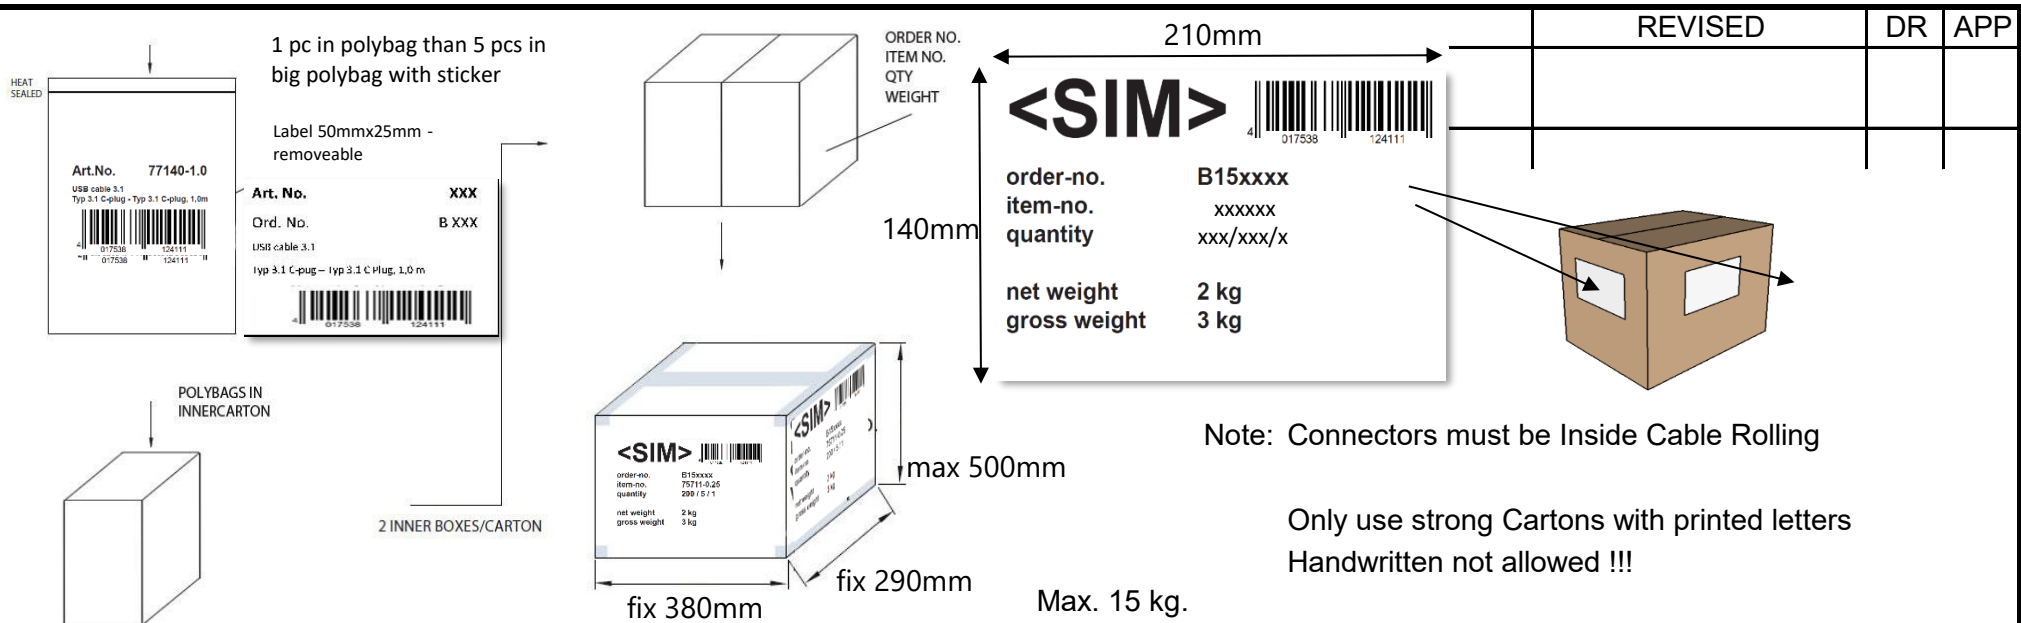

ART.NO.	LENGTH	ROLLING SIZE	NET.WEIGHT (g)	PACKING	EAN CODE
10-50025	1.0m	130x130x20mm	56g	100 EXP / 50 INNER - 5/1 pc in pb with st.	4017538106582
10-50035	2.0m	130x130x20mm	96g	80 EXP / 40 INNER - 5/1 pc in pb with st.	4017538106599
10-50045	3.0m	150x150x25mm	133g	50 EXP / 25 INNER - 5/1 pc in pb with st.	4017538106605

DESCRIPTION		DISPLAYPORT 1.2 CONNECTING CABLE, 19PIN						
SIZE	A4	DATE	15.07.2025	CHECKED			TOL	
UNIT	MM	DRAWN	R.Hüller	APPROVED				10-50025

CUSTOM TARIF NO.: 85444290900			
-------------------------------	--	--	--