


	REVISED	DR	APP



PIN OUT

CN1	CN2
19	01
14	02
01	03
02	04
03	05
04	06
05	07
06	08
07	09
08	10
09	11
10	12
11	13
12	14
13	15
17	16
15	17
16	18
18	19
SHELL	SHELL

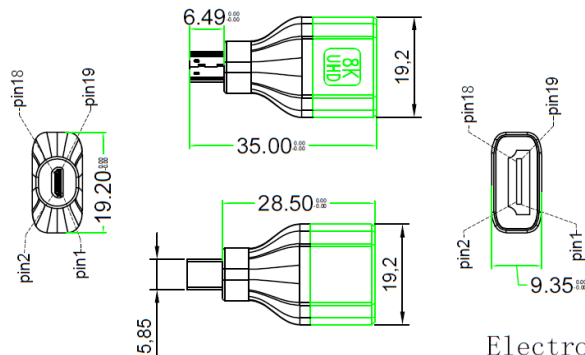

Electronic Test:

- 1.1 100% no open 、no short
- 1.2 Conductor Impedance $\leq 5.0\Omega$
- 1.3 Insulation impedance $\geq 10M\Omega$;
- 1.4 DC:300V 0.1S voltage drop
- 1.5 Test by 4K120Hz / 8K 60Hz

Use this adapter to change an HDMI-A plug into a HDMI-D plug.

This adapter supports 8K 60Hz / 4K 120Hz and is backward compatible with all HDMI standards.

Micro HDMI is common used on single board computers, action camcorders, DSLRs, UMPCs, VDSLRS or tablet PCs.

Please note that passive adapters and extension cables reduce the signal power. it is possible that longer cables cant reach the full bandwidth with them.

- Connections: HDMI-A jack to HDMI-D plug
- Resolution up to: 8K (60Hz), 4K (120Hz)
- Supports: HDCP 2.3, CEC 2.0, 3D, Dynamic HDR, VRR
- HDMI Version: Ultra High Speed with Ethernet (HDMI 2.1)
- Backward compatible: to all HDMI standards
- Maximum bandwidth: 48 Gbps
- Signal direction: Bidirectional (non-directional)


- Contact surface: Gold-plated pins
- Housing material: PVC + ALU
- Color: black / silver



5	Outer model	PVC 45P black + aluminum alloy
4	Internal model	PVC30P compounds Black
3	Intrajoin	PCB T=1.6MM
2	connector	HDMI 19P A(M) gold plated
1	connector	HDMI 19P A(FEMALE) gold plated

NO	PART NAME	PICTURES AND COLORS CAN DIFFER FROM THE PRODUCT
----	-----------	---

DESCRIPTION		HDMI-D ADAPTER, HDMI-A JACK, 8K, METAL					
SIZE	A4	DATE	15.07.2025	CHECKED		TOL	10-01058
UNIT	MM	DRAWN	R.Hüller	APPROVED			
CUSTOM TARIF NO.: 85366990990							

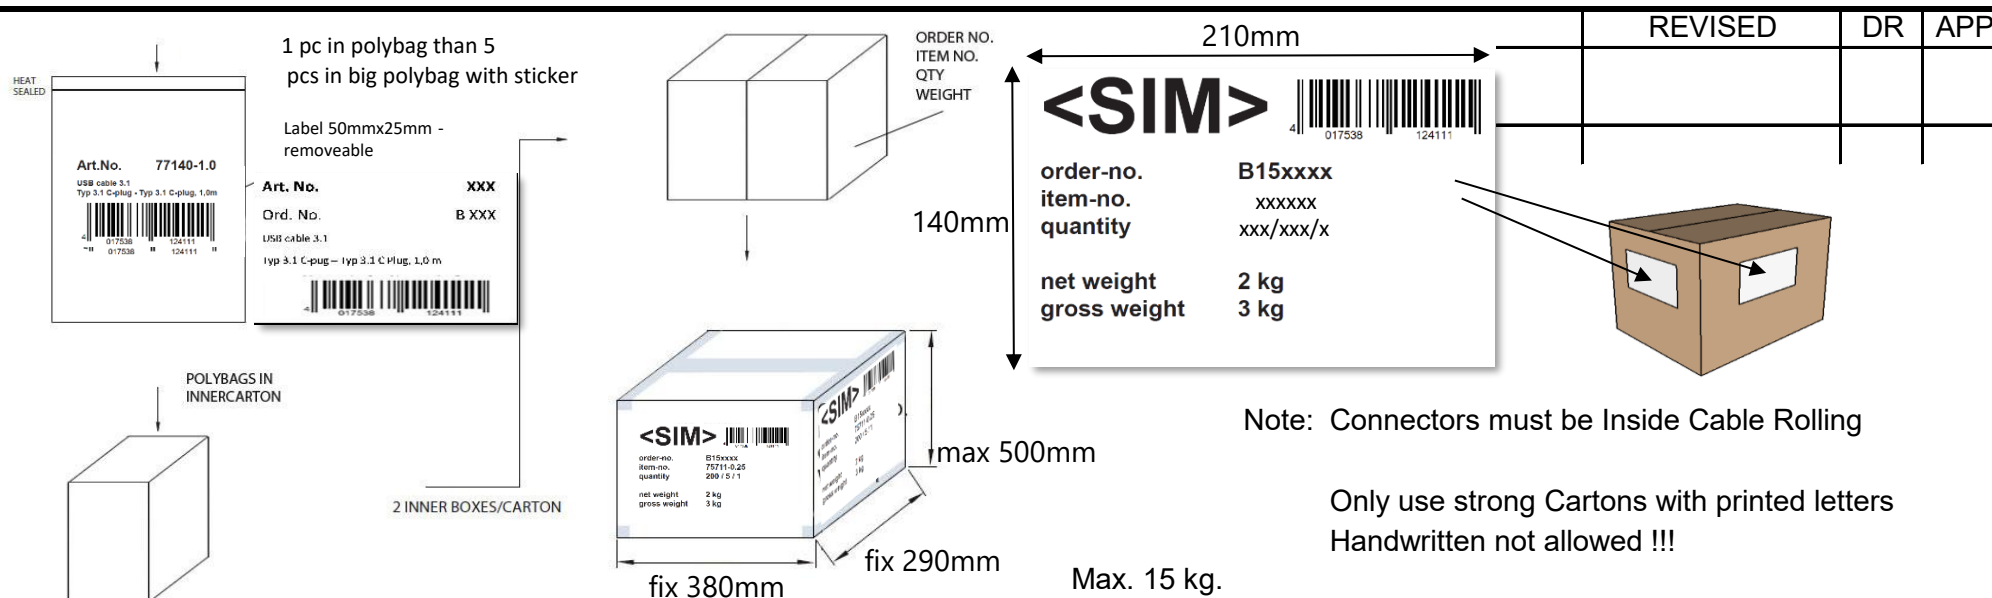

ART.NO.	COLOR	ROLLING SIZE	NET.WEIGHT (g)	PACKING	EAN CODE
10-01058	SILVER	35x20x10mm	8g	1000 EXP / 500 INNER - 5/1 pc in pb with st.	4017538137562

DESCRIPTION			HDMI-D ADAPTER, HDMI-A JACK, 8K, METAL				
SIZE	A4	DATE	15.07.2025	CHECKED		TOL	10-01058
UNIT	MM	DRAWN	R.Hüller	APPROVED			
CUSTOM TARIF NO.: 85366990990							