


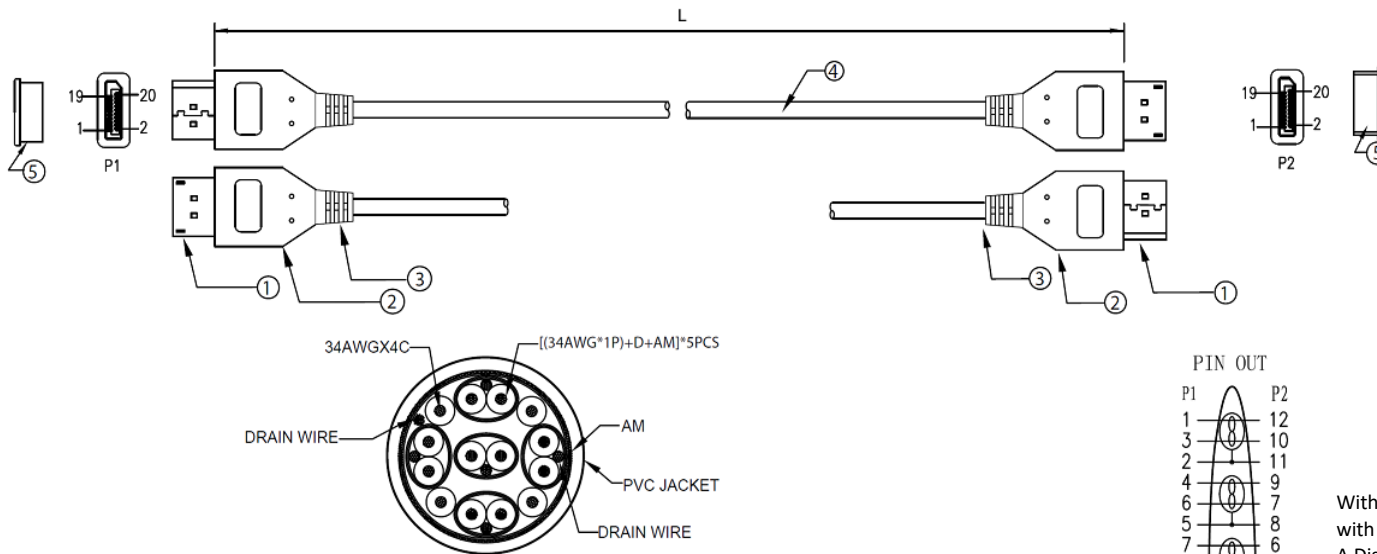


Printing:High Speed Cable 20276 80 C 30V VW-1

NOTE:

1.Electrical properties:

- 1.ALL COMPONENTS ARE RoHS COMPLIANT.
 - 2.100% OPEN AND SHORT TEST.
 - 3.CONDUCTOR RESISTANCE:3 OHMS
 - 4.INSULATION RESISTANCE:10 MEGOHMS.
 - 5.Tested by Quantumdata 780E handheld test Instrument for DP1.2(21.6G) 3840*2160 60Hz(8bit) pass
- 2.ROHS 2.0 and REACH

Length	DSP
500mm	4K60Hz 4:4:4 8bit
1000mm	4K60Hz 4:4:4 8bit
1500mm	4K60Hz 4:4:4 8bit
1800mm	4K60Hz 4:4:4 8bit
2000mm	4K60Hz 4:4:4 8bit
3000mm	4K60Hz 4:4:4 8bit

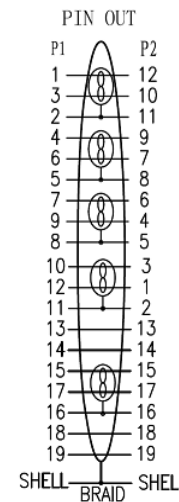

With the DisplayPort 1.2 cable you connect e.g. your graphic card with a monitor, TV or video projector.
A DisplayPort cable transmits digital video and audio signals.
This cable supports a maximum bandwidth of 21.6 Gbps and a maximum resolution of 3840 x 2160 with 60 Hz.

- Connections: DisplayPort plug to DisplayPort plug (20P20C)
- Resolution up to: 4K2K (60Hz), 2560 x 1440 (165Hz)
- Supports color sampling in 4:4:4, 4:2:2 and 4:2:0 format
- Supports: HDCP 1.3, 3D, Adaptive Sync, MST, HBR2
- max. Bandwidth: 21.6 Gbps
- DisplayPort Version: 1.2
- Backwards compatible Versions: 1.1
- Plug: moulded, gold plated
- DP-plug without snap in latch
- Contact surface: gold-plated pins
- Construction cable: AWG 34
- Wire material: copper
- Number of shieldings: 2
- Shielding 1: ALU foil laminated PIMF (100% density)
- Shielding 2: ALU foil (100% density)
- Cable type: round, slim (thin and flexible)
- Material cable sheath: PVC
- Cable sheath diameter (ca.): 3.8mm
- Color: black

④	CABLE	(1/0.160T*1P+1C+AL+MY)*5C+1/0.160T*4C+D+AL+PVC OD:3.8±0.1MM COLOR:BLACK
③	OUTER MOLD	BLACK PVC
②	OUTER MOLD	BLACK PVC
①	CONNECTOR	DP1.2 MALE ,GOLD PLATED PIN,GOLD PLATED SHELL


DESCRIPTION

DP PLUG - DP PLUG 1.2 SLIM 4K

SIZE	A4	DATE	15.07.2025	CHECKED		TOL	
UNIT	MM	DRAWN	R.Hüller	APPROVED			
CUSTOM TARIF NO.: 8544429090							

10-49015



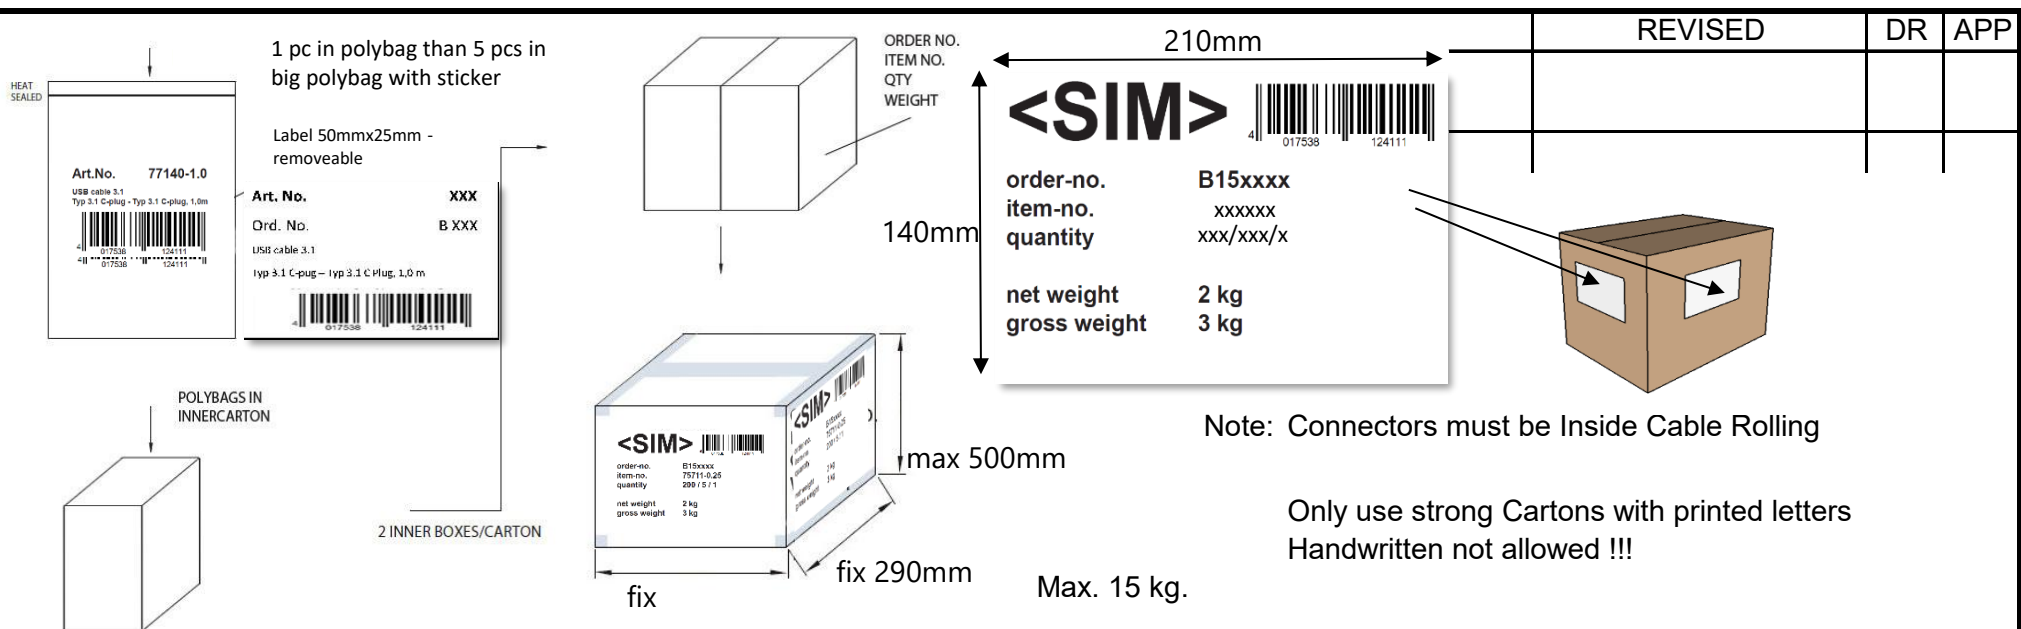

ART.NO.	LENGTH	ROLLING SIZE	NET.WEIGHT (g)	PACKING	EAN CODE
10-49015	0.5m	150x150x10mm	35g	250 EXP / 125 INNER - 5/1 pc in pb w. st.	4017538130624
10-49025	1.0m	150x150x10mm	40g	200 EXP / 100 INNER - 5/1 pc in pb w. st.	4017538130631
10-49155	1.5m	150x150x15mm	50g	200 EXP / 100 INNER - 5/1 pc in pb w. st.	4017538130648
10-49035	2.0m	150x150x20mm	61g	150 EXP / 75 INNER - 5/1 pc in pb w. st.	4017538130655
10-49045	3.0m	130x130x15mm	77g	100 EXP / 50 INNER - 5/1 pc in pb w. st.	4017538130662

DESCRIPTION		DP PLUG - DP PLUG 1.2 SLIM 4K						
SIZE	A4	DATE	15.07.2025	CHECKED			TOL	10-49015
UNIT	MM	DRAWN	R.Hüller	APPROVED				
CUSTOM TARIF NO.: 8544429090								