


	REVISED	DR	APP

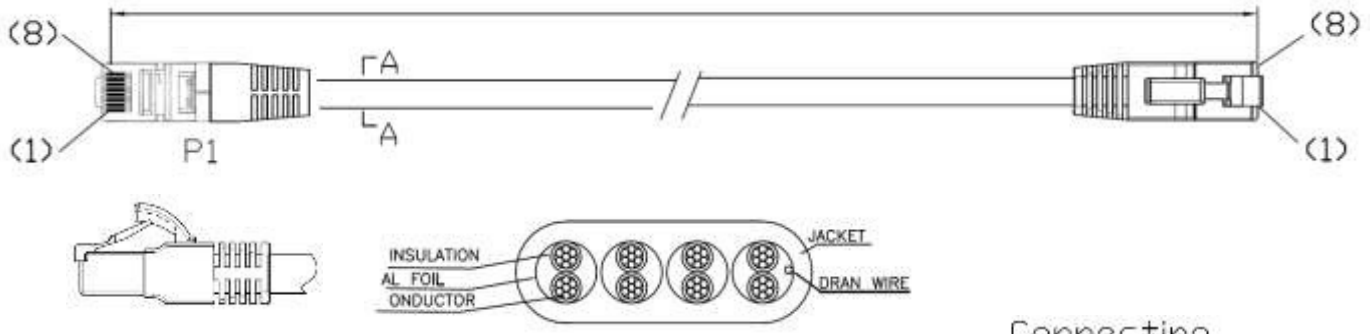

Connecting

P1	568B	P2
1	WH/ORG	1
2	ORG	2
3	WH/GRN	3
4	BLU	4
5	WH/BLU	5
6	GRN	6
7	WH/BWN	7
8	BWN	8

SHELL — DRAIN — SHELL

SPECIFICATIONS:

- 1.1 CONDUCTOR:30AWG(7*0.10) COPPER
- 1.2 CONDUCTOR INSULATION COLOR CODING: ONE WHITE/GREEN, ONE GREEN, ONE WHITE/ORANGE, ONE BLUE, ONE WHITE/BLUE, ONE ORANGE, ONE WHITE/BROWN, ONE BROWN.

1 CONNECTORS	RJ-45 - RJ-45, STP, GOLD PLATED PRONGS, CAT 6A
2 MOLDING	MOLDED BOOT, PVC
3 CABLE	CAT 7 U/FTP 30AWG [1P(7*0.10CU)+D+AL]+[1P(7*0.10CU)+AL]*3, OD: 8.25*2.7 ± 0.2MM, JACKET: PVC
NO PART NAME	


Note: (Color Codes)

- Blue RAL 5005 RAL
- Yellow 1003 RAL 3020
- Red RAL 6024 RAL
- Green 9003 RAL 9005
- White RAL 7044
- Black (standard)
- Grey

TEMPERATURE -5°/+70°C



DESCRIPTION		FLAT PATCH CABLE, U/FTP, CAT 7 RAWCABLE, 600 MHz					
SIZE	A4	DATE	23.06.2025	CHECKED		TOL	
UNIT	MM	DRAWN	R.Hüller	APPROVED			75511-SL
CUSTOM TARIF NO.: 85444210000							

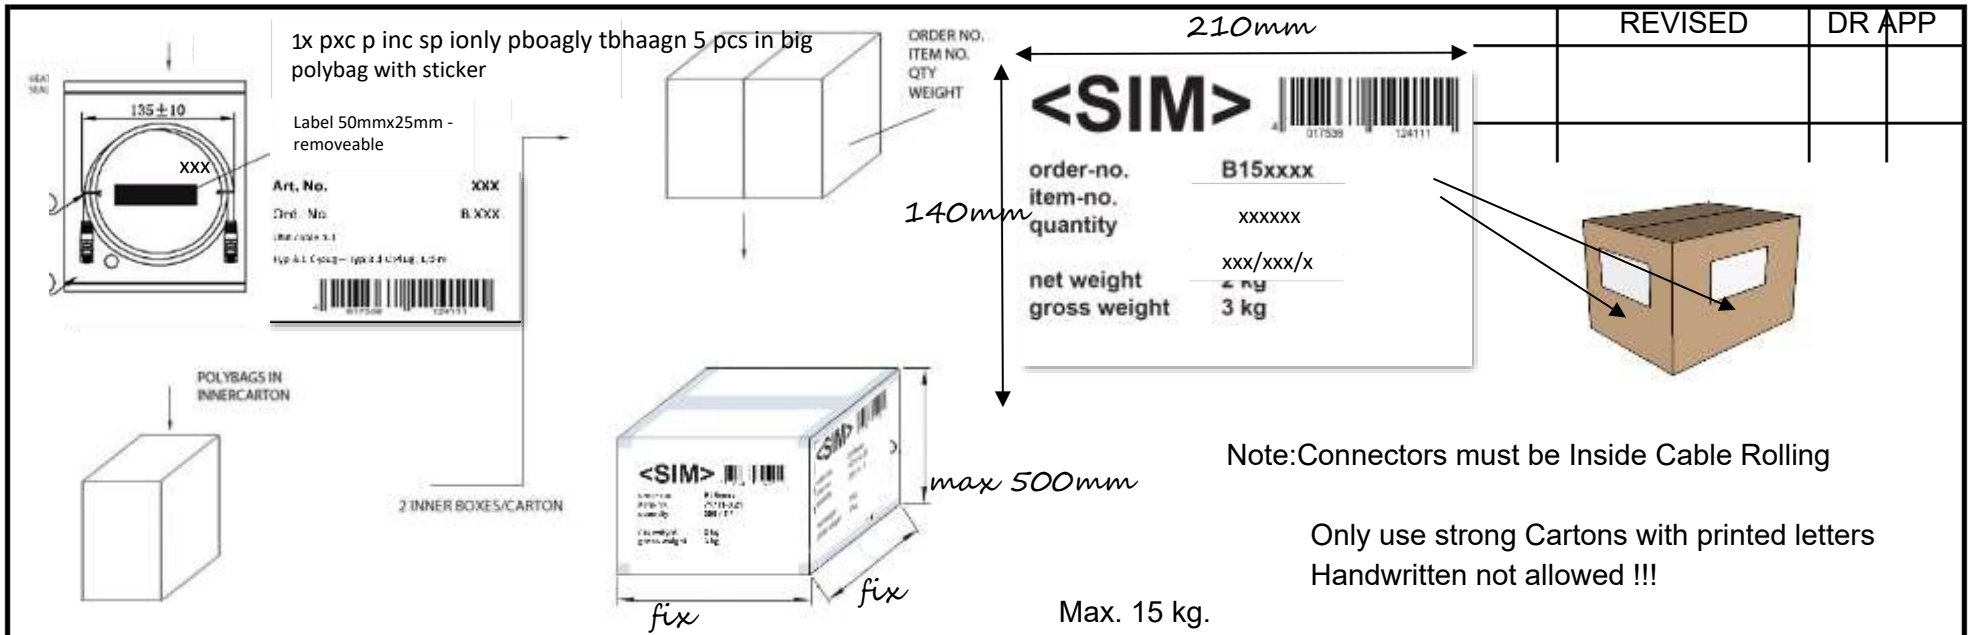

ART.NO.	LENGTH	ROLLING SIZE	NET.WEIGHT (g)	PACKING	EAN CODE
75511-SL0.25	0,25m	130x100x12	19g	250 EXP - 5/1 pc in polybag with sticker	
75511-SL0.5	0,5m	110x100x12	28g	250 EXP - 5/1 pc in polybag with sticker	
75511-SL	1.0m	105x100x12	45g	200 EXP - 5/1 pc in polybag with sticker	
75512-SL	2.0m	130x120x20	73g	100 EXP - 5/1 pc in polybag with sticker	
75513-SL	3.0m	150x130x35	105g	100 EXP - 5/1 pc in polybag with sticker	
75515-SL	5.0m	160x140x35	163g	50 EXP - 5/1 pc in polybag with sticker	
75517-SL	7,5m	170x140x35	250g	50 EXP - 5/1 pc in polybag with sticker	
75520-SL	10.0m	150x150x40	350g	40 EXP - 5/1 pc in polybag with sticker	
75525-SL	15.0m	160x155x45	502g	30 EXP - 5/1 pc in polybag with sticker	

DESCRIPTION		FLAT PATCH CABLE, U/FTP, CAT 7 RAWCABLE, 600 MHz				
SIZE A4	DATE	23.06.2025	CHECKED		TOL	75511-SL
UNIT MM	DRAWN	R.Hüller	APPROVED			
CUSTOM TARIF NO.: 85444210000						